
Note: Shown for Type A,B and C Bms. Replace 1'-0" dimensions with 1'-2" for Type IV Bms.

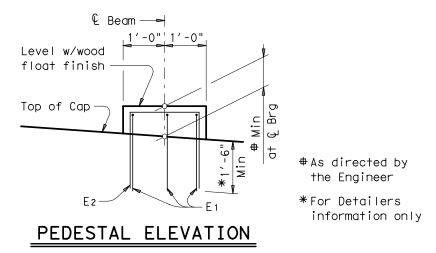

(Bearing surface shall be clean and free of all loose material before placing bearing pad.)

Fig. 4-32